

# WOOD PANELS FOR FURNITURE OAK A

**A:** Typical structural appearance of rift and plain cut, virtually knotless, occasional pin knots possible, nearly no repairs, no sapwood, slight colour variations possible, jointfree gluing.


**Bottom layer A:** as above.

**Bottom-layer B:** Typical structural appearance of rift and plain cut, sound knots and dead knots possible, knotholes professionally filled, no sapwood, natural colour variations, jointfree gluing.

**Bottom-layer C+:** filled.



The above picture shows an example of the natural character of the wood, this will vary in every panel.

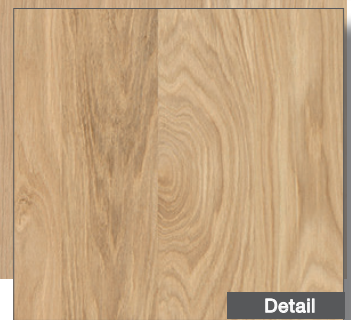

Grading	Thickness mm approx.	Lengths in mm (Width 2030 mm)	Top layer Thickness mm approx.	Top layer Width mm	Middle layer	Packaging Pieces/ Pallet	Price € excl. taxes
A/A	19	2000/2400	3,6	93/114 only available in length 2400 mm	Oak 3-Layer	30	on request
A/B	19	2000/2400	3,6	158 only available in Lengths 2000 and 2400 mm	Oak 3-Layer	30	
A/C+	19	2000/2400	3,6		Oak 3-Layer	30	

Panels are glued SWP/2 NS (non structural): solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas).

Middle layer made of 3 layers of finger-jointed oak lamellas glued in parallel.

Detailed information on fire behavior in different installation situations can be found in the accompanying CE information.



max. 2 joints

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads>

Type of wood	Thickness (mm)	Middle layer	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]
Oak	19	Oak 3-Layer	13,1	7+/-2	0,17



You can find more detailed information at: [admonter.com](http://admonter.com)

Admonter Holzindustrie AG, Sägestrasse 539, 8911 Admont, Austria

Errors and changes possible, Phone: +43(0)3613/3350-0, Fax: +43(0)3613/3350-119, [info@admonter.at](mailto:info@admonter.at), [admonter.com](http://admonter.com)

# WOOD PANELS FOR FURNITURE OAK B

**B:** Typical structural appearance of rift and plain cut, sound knots and dead knots possible, knotholes professionally filled, no sapwood, natural colour variations, jointfree gluing.

**C:** no special quality specifications, surface not filled.

ELEMENTS



The above picture shows an example of the natural character of the wood, this will vary in every panel.

Grading	Thickness mm approx.	Lengths in mm (Width 2030 mm)	Top layer Thickness mm approx.	Top layer Width mm	Middle layer	Packaging Pieces/ Pallet	Price € excl. taxes
B/B	19	2000/2400	3,6	158	Oak 3-Layer	30	on request
B/C	19	2000/2400	3,6	158	Oak 3-Layer	30	

Panels are glued SWP/2 NS (non structural): solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas).

Middle layer made of 3 layers of finger-jointed oak lamellas glued in parallel.

Detailed information on fire behavior in different installation situations can be found in the accompanying CE information.



max. 2 joints

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads>

Type of wood	Thickness (mm)	Middle layer	Weight [kg/m <sup>2</sup> ]	Moisture content [%]	Lambda [W/m K]
Oak	19	Oak 3-Layer	13,1	7+/-2	0,17



You can find more detailed information at: [admonter.com](http://admonter.com)

The above picture shows an example of the natural character of the wood, this will vary in every panel. Variations in colour and grain patterns are natural and inevitable. A picture is never a substitute for the "real thing". For this reason we recommend a visit to your nearest Admonter dealer. He will be pleased to show you samples.

# WOOD PANELS FOR FURNITURE OAK R

**R:** Typical structural appearance of rift and plain cut, sound knots, black knots and spike knots possible, knot holes and shakes are professionally filled, no sapwood; shakes, heartwood, bark pockets and worm holes enhance the rustic character, contrasting colour variations are a valued feature. Joint free gluing. Surface filled.

**Bottom layer R:** as above.



The above picture shows an example of the natural character of the wood, this will vary in every panel.

Grading	Thickness mm approx.	Lengths in mm (Width 2030 mm)	Top layer Thickness mm approx.	Top layer Width mm	Middle layer	Packaging Pieces/ Pallet	Price € excl. taxes
R/R	19	2400	3,6	158	Oak 3-Layer	30	on request

Panels are glued SWP/2 NS (non structural): solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas).  
Middle layer made of 3 layers of finger-jointed oak lamellas glued in parallel.  
Detailed information on fire behavior in different installation situations can be found in the accompanying CE information.



max. 2 joints

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads>

Type of wood	Thickness (mm)	Middle layer	Weight [kg/m <sup>2</sup> ]	Moisture content [%]	Lambda [W/m K]
Oak	19	Oak 3-Layer	13,1	7+/-2	0,17



You can find more detailed information at: [admonter.com](http://admonter.com)

The above picture shows an example of the natural character of the wood, this will vary in every panel. Variations in colour and grain patterns are natural and inevitable. A picture is never a substitute for the "real thing". For this reason we recommend a visit to your nearest Admonter dealer. He will be pleased to show you samples.

ELEMENTS