

Ash Natura

Top layer aprox. 3,6 mm Maintenance oil easy care nature



Admonter FLOORs on underfloor heating systems

Admonter FLOORs are ideally suited for underfloor heating systems. We suggest that

for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Admonter FLOORs on underfloor heating systems!



Our floors, walls, ceilings, stairs, doors or even acoustic solutions are perfectly harmonised to turn your ideas into reality and give every room a very special atmosphere.

Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit admonter.com/de/downloads/

Please note: Easy-Care (EC) natural oiled easy care - NO INITIAL OIL TREATMENT REQUIRED! For repair and supplementary oils see the Admonter pricelist.

Grading	Thickness (mm)	Construction	Width (mm)	Format	Length (mm)	Texture	Finish	Profile
noblesse	15	3-layer	192	classic	2000	brushed	ec	Tongue & groove
			192	classic	2400	brushed	ec	Tongue & groove

ec: natural oiled easy care



















More information (for example concerning fire classification) in the accompanying information to CE-marking at http://www.admonter.eu/de/downloads/

Type of wood	Width (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	D-Value R [m² K/W]	Hardness [N/ mm²]	Fire classification*
Esche Laubholz-Rückseite	15	8,6	7+/-2	0,14	0,107	38	C _f -s1
Esche Nadelholz-Rückseite	15	7,8	7+/-2	0,14	0,107	38	C _f -s1

Admonter ?

Wooden floors Floors

admonter.com

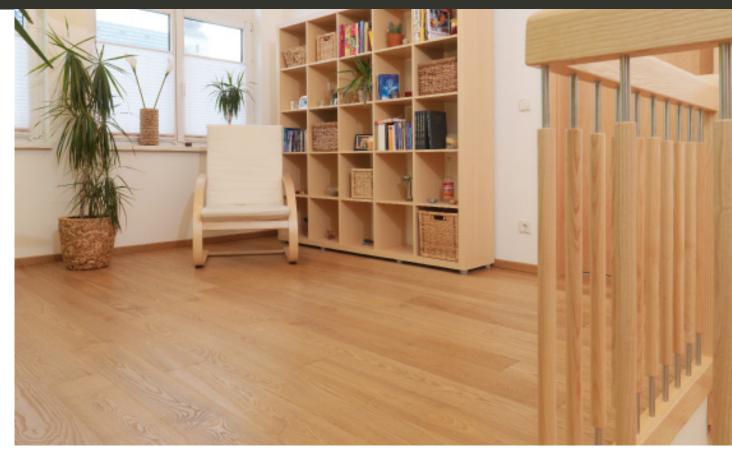















Feature wooden floors	Benefit			
Choice of countless wood species, in particular reclaimed wood	Wide range of options for customized products, precisely tailored to customer benefits / requirements -> for every customer or area of application.			
Different structure possibilities and colour shades				
Individual colours (Easy-Color)	The right surface for every customer or area of application / living			
Different surfaces (natural oiled easy-care, natural-oiled pro-care, matt lacquered) – advantages EC	situation Oberflächenvergleich Flüssigkeitstest			
Different construction variants, thicknesses and profiles / installation systems	The right product for every application / purpose			
Different formats (SMALL, CLASSIC, LONG, XXLong)	The right product for every room size and situation			
Different widths that can be laid together	Great appearence of the floor in large rooms			
Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside as a counter layer with solid wood construction) For wood type oak 240mm width = hardwood reverse side	Rigid against torsion -> the floor lies flatter and the positon of joints is reduced, even with wide plank flooring			

ADMONTER ACCESSORIES SKIRTING



ADMONTER ACCESSORIES STAIR NOSING



Wooden floors Floors

Wooden panels Elements Wooden acoustic panels

Wooden stairs

Wooden doors