



Admonter FLOORs on underfloor heating systems

Admonter FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Admonter FLOORs on underfloor heating systems!

Admonter room concepts

Our floors, walls, ceilings, stairs, doors or even acoustic solutions are perfectly harmonised to turn your ideas into reality and give every room a very special atmosphere.

Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit admonter.com/de/downloads/

Please note: Easy-Care (EC) natural oiled easy care - NO INITIAL OIL TREATMENT REQUIRED! For repair and supplementary oils see the Admonter pricelist.

Please note: Pro Care Plus (PC+): All Pro Care Plus Floors are hardened by oxidation & additionally actory-maintained. NO initial maintenance required.

Grading	Thickness (mm)	Construction	Width (mm)	Format	Length (mm)	Texture	Finish	Profile
basic	15	3-layer	195	classic	1850	brushed	ec	Tongue & groove
			195	classic	2000	brushed	ec	Tongue & groove
			195	classic	2400	brushed	ec	Tongue & groove
			195	classic	1850	brushed	ec	lock-it
			195	classic	2000	brushed	ec	lock-it
			195	classic	2400	brushed	ec	lock-it
			158	xxlong	3870	brushed	ec	Tongue & groove
			158	xxlong	4470	brushed	ec	Tongue & groove
			158	xxlong	4870	brushed	ec	Tongue & groove
			192	xxlong	3870	brushed	ec	Tongue & groove
			192	xxlong	4470	brushed	ec	Tongue & groove
			192	xxlong	4870	brushed	ec	Tongue & groove
			195	classic	1850	strongly brushed	pc+	Tongue & groove
			195	classic	2000	strongly brushed	pc+	Tongue & groove
			195	classic	2400	strongly brushed	pc+	Tongue & groove
			195	classic	1850	strongly brushed	pc+	lock-it
			195	classic	2000	strongly brushed	pc+	lock-it
			195	classic	2400	strongly brushed	pc+	lock-it
			158	xxlong	3870	strongly brushed	pc+	Tongue & groove
			158	xxlong	4470	strongly brushed	pc+	Tongue & groove
			158	xxlong	4870	strongly brushed	pc+	Tongue & groove
			192	xxlong	3870	strongly brushed	pc+	Tongue & groove
			192	xxlong	4470	strongly brushed	pc+	Tongue & groove
			192	xxlong	4870	strongly brushed	pc+	Tongue & groove
			195	classic	1850	autentico strongly brushed.	pc+	Tongue & groove
			195	classic	2000	autentico strongly brushed.	pc+	Tongue & groove
			195	classic	2400	autentico strongly brushed.	pc+	Tongue & groove


ec: natural oiled easy care
pc+: pro care+

Technical information


More information (for example concerning fire classification) in the accompanying information at <http://www.admonter.eu/de/downloads/>



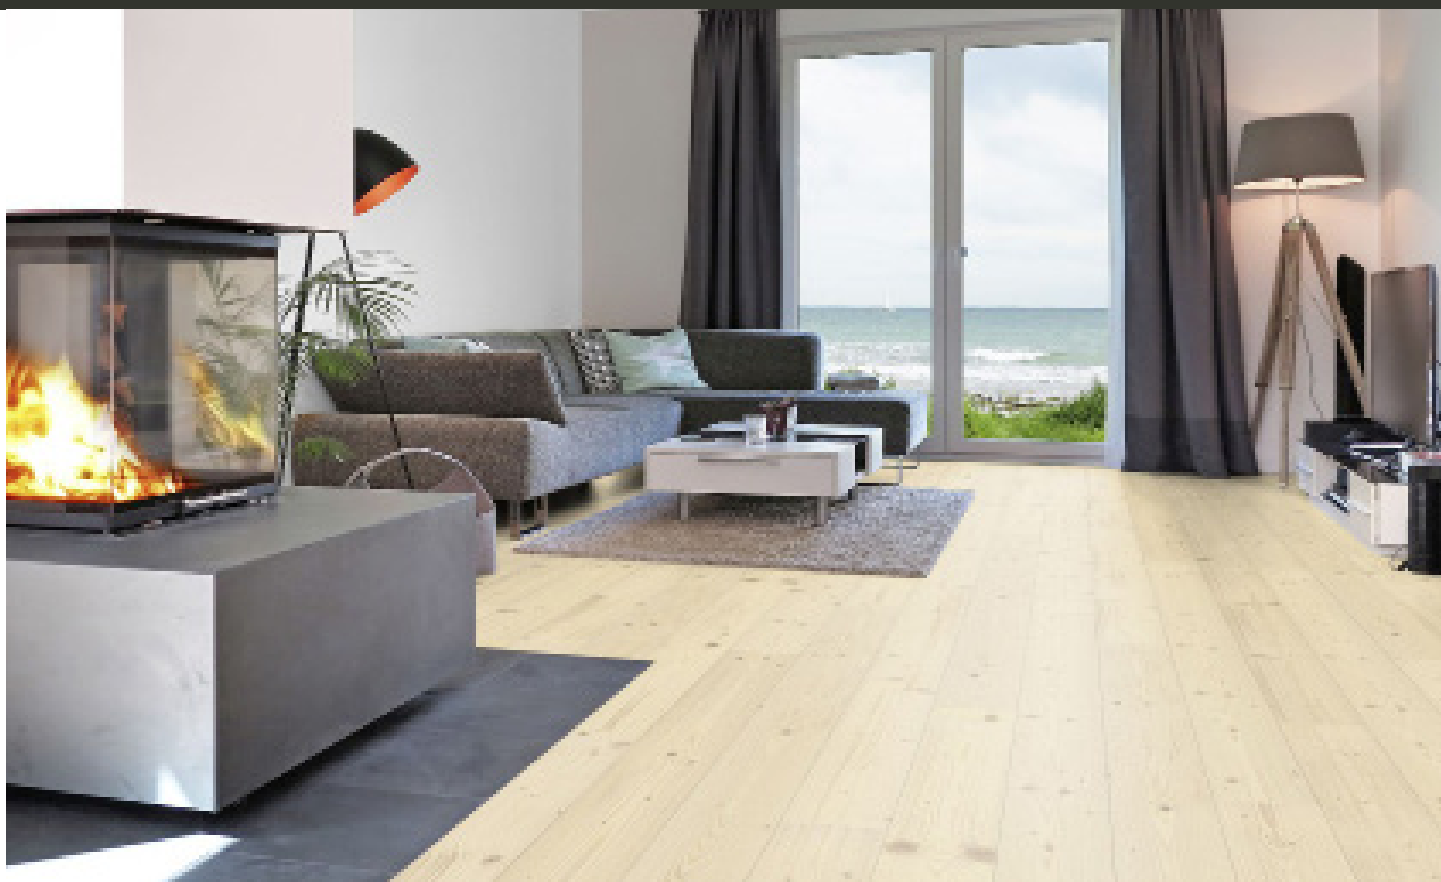

Type of wood	Width (mm)	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]	D-Value R [m ² K/W]	Hardness [N/mm ²]	Fire classification
Spruce	15	7	8+/-2	0,12	0,125	12	F _{fl} *

*Full surface glueing & Factory finish C_{fl}-s1



Feature wooden floors	Benefit
Choice of countless wood species, in particular reclaimed wood	Wide range of options for customized products, precisely tailored to customer benefits / requirements -> for every customer or area of application.
Different structure possibilities and colour shades	
Individual colours (Easy-Color)	The right surface for every customer or area of application / living situation Oberflächenvergleich Flüssigkeitstest
Different surfaces (natural oiled easy-care, natural-oiled pro-care, matt lacquered) – advantages EC	
Different construction variants, thicknesses and profiles / installation systems	The right product for every application / purpose
Different formats (SMALL, CLASSIC, LONG, XXLlong)	The right product for every room size and situation
Different widths that can be laid together	Great appearance of the floor in large rooms
Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside as a counter layer with solid wood construction) For wood type oak 240mm width = hardwood reverse side	Rigid against torsion -> the floor lies flatter and the position of joints is reduced, even with wide plank flooring

ADMONTER ACCESSORIES SKIRTING	Type 2 D 
----------------------------------	---

ADMONTER ACCESSORIES STAIR NOSING	Example pictures! All available stair nosings (depending on wood type and thickness), you can find in the price list.		Example object	
				

Wooden floors
Floors

Wooden panels
Elements

Wooden acoustic panels
Acoustics

Wooden stairs
Stairs

Wooden doors
Doors