Oak Aurum

Top layer aprox. 3,6 mm lightly smoked Maintenance oil white





Wooden floors Floors





Admonter on underfloor heating systems Admonter FLOORs are ideally

suited for underfloor heating systems.

We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (\mathbf{M} , xcept 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Admonter FLOORs on underfloor heating systems!

Admonter Accessories

The wide range of accessories matches the Admonter FLOORs and includesflush-mount skirting and solutions for staircases.

Regular care and maintenance

Please.

PLEASE NOTE: natural oiled easy care - NO INITIAL OIL TREATMENT IS REQUIRED! Repair and supplementary oils you can find in our Admonter price list. Further information about our products can be found at admonterat

Grading	Thickness (mm)	Construction	Width (mm)	Format	Length (mm)	Structure	Fin	ish	Profile
rustic	10,5	2-layer	158	classic	2000	brushed	ec		lock-it
			180	classic	2000	brushed	ec		lock-it
	15	3-layer	158	classic	2000 / 2400	brushed	ec		Tongue & groove
						brushed	ec		lock-it
						cross	ec		Tongue & groove
			192	classic	2000 / 2400	brushed	ec		Tongue & groove
						brushed	ec		lock-it
						cross	ec		Tongue & groove

 $\textbf{Backing:} \ \text{Solid wood / } \textbf{ec:} \ \text{natural oiled easy care / } \textbf{pc:} \ \text{natural oiled pro care / } \textbf{ml:} \ \text{matt lacquered}$

technical information More information (for example concerning fire classification) in the accompanying information to CE-marking at							ads/
Type of wood	Thickness (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	D-Value R [m² K/W]	Hardness [N/mm²]	Fire classification
Oak	10,5	5,7	7+/-2	0,15	0,067	41	C _{ff} -s1
Oak LH-RS	15	8,6	7+/-2	0,15	0,100	41	C _{ff} -s1
Oak NH-RS	15	7,8	7+/-2	0,14	0,107	41	C _{ff} -s1

LH-RS: Hardwood-backing / NH-RS: Softwood-backing

























Wooden floors Floors

Wooden Stairs

Wooden Doors

Oak Aurum

Top layer aprox. 3,6 mm lightly smoked Maintenance oil white



Room concepts made of natural wood for floors, walls & ceilings



Feature wooden floors	Benefit			
Choice of countless wood species, in particular reclaimed wood	Wide range of options for customized products, precisely tailored to customer benefits / requirements -> for every customer or area of application.			
Different structure possibilities and colour shades				
Individual colours (Easy-Color)	The right finish for every customer or area of application / living			
Different finishings (natural oiled easy-care / natural oiled pro care / matt lacquereded	situation Finish Video liquid test			
Different construction variants, thicknesses and profiles / installation systems	The right product for every application / purpose			
Different formats (SMALL, CLASSIC, LONG, XXLong)	The right product for every room size and situation			
Different widths that can be laid together	Great appearence of the floor in large rooms			
Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside as a counter layer with solid wood construction) For wood Typee oak 240mm width = hardwood reverse side	Rigid against torsion -> the floor lies flatter and the positon of joints is reduced, even with wide plank flooring			

ADMONTER ACCESSORIES SKIRTING



ADMONTER ACCESSORIES STAIR NOSING



























Wooden Floors Floors




Smoked products:

The smoking process naturally highlights the color differences caused by fluctuations in the tannic acid content of the tree. Due to the change in pH during the smoking process, these tannins react with the atmospheric oxygen, which causes the desired color changes. Since the pH value does not suddenly change at the end of the smoking process and atmospheric oxygen is also omnipresent, natural post-ripening processes occur. These ripening processes subside in the first few months until the desired color is achieved.

This play of colors can be seen on a small scale within a plank and over a large area from one plank to another. Due to nature and depending on the origin of the wood, different dimensions may have different colour shades although having the same colour basis.

Natural colour changes:

All Admonter floors are a natural product and will over time change colour. Depending on the amount of exposure your floor has to sunlight, lighter timber will turn darker and darker timber will become lighter. This change is most pronounced in the first 3-6 months.

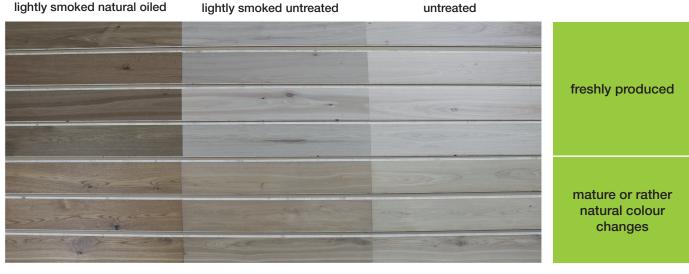


























Wooden Floors Floors

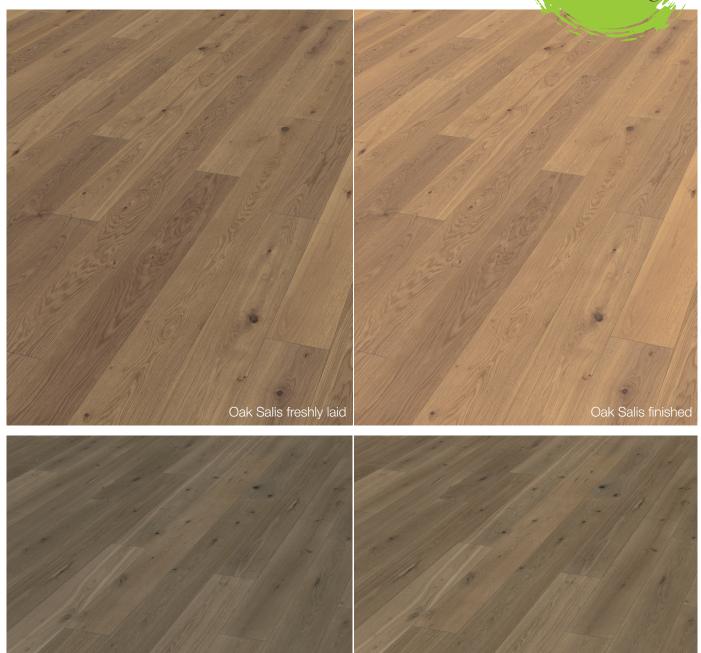













Oak Seta freshly laid











Oak Seta finished



Wooden Floors Floors















Oak Lapis freshly laid











Oak Lapis finished



Wooden Floors Floors



























Wooden Floors Floors























