

Fir Rift/Semirift

brown filler

Admonter

Wooden panels

A: slight natural colour variation possible, calm and reduced appearance of rift/quarter cut, contrasting colour variation are a valued feature (greyish/blueish/redish). Sound knots and dead knots possible, bark pockets and small cracks as well as cracked knots partially allowed, knotholes professionally filled. Joint free gluing.

Backing C+: fir, knotholes and shakes professionally filled, twin layers not laid next to each other, no special quality specifications, finger-jointed allowed.

This panel is also available with sauna-suitable gluing and fulfils the formaldehyde emission requirements in accordance with ÖNORM M 6219-1:2010. Especially when used in saunas, attention must be paid to the possibility of occasional resin leakage and shedding. The maximum permissible temperature of 105°C must not be exceeded, even locally (e.g. near the oven). Where necessary, conformity with ÖNorm M 6219 or the respective other national or local requirements must be ensured by the planning/executing company. Please also refer to our data sheet „Use in saunas“.

[„Use in saunas“](#).



The above picture shows an example of the natural character of the wood, this will vary in every panel.

Grading	Thickness mm approx.	Length mm (Width 2030 mm)	Top layer thckn. mm approx.	Top layer width mm	Middle layer (subject to availability)	Packaging pieces/palett
A/C+	19	3000-3900	5	approx.. 93	SML/BML - Fichte	30

The panels are SWP/2 non structural (NS) glued: solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas). Legend: SML = strip core, BML = board middle layer. More information concerning fire classification in the accompanying information to CE-marking.

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads/>

Type of wood	Thickness (mm)	Middle layer	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]
Fir Rift/Semirift	19	Softwood	9,12	8+/-2	0,12



Errors and changes excepted.

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont, Austria | info@admonter.at | admonter.com


5.09.2024

Fir Rift/Semirift

brown filler

Admonter

Wooden panels

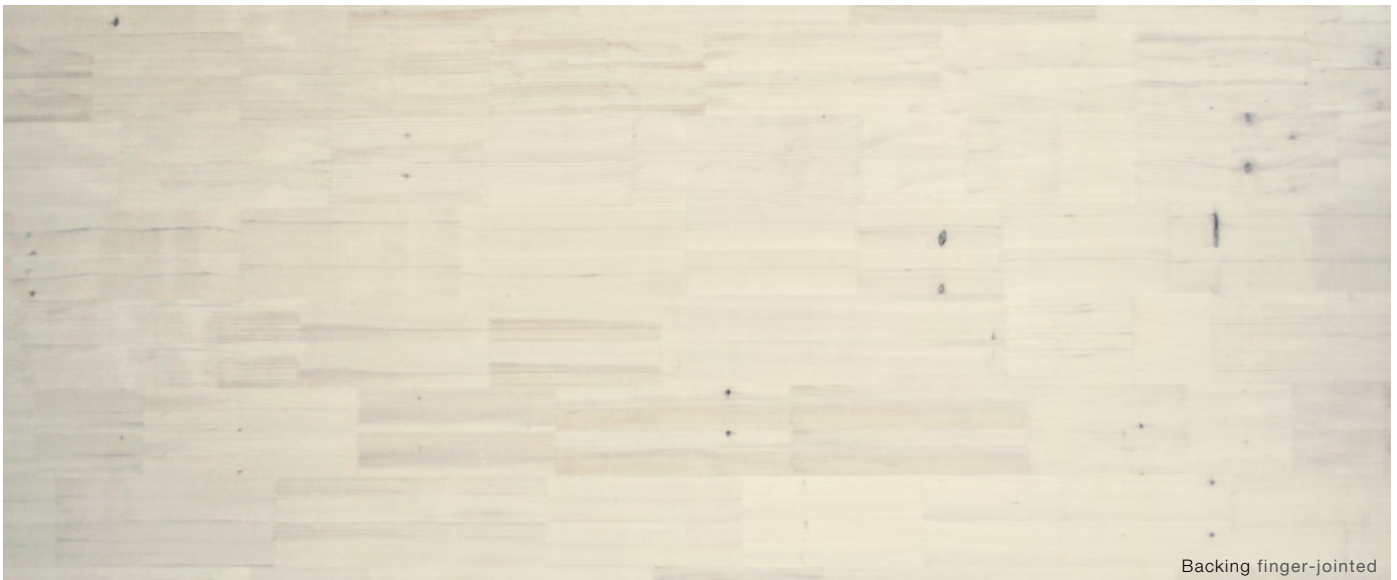

Errors and changes excepted.

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont, Austria | info@admonter.at | admonter.com

5.09.2024



Features wooden panels Elements	Benefit
Standard-width 2030 mm for ALL ELEMENTS	Simple stock-keeping (no short lengths: e.g. reclaimed wood) Calculation of offcuts / less articles by product group -> more comprehensive
Choice of countless wood species – in particular reclaimed wood	Wide range of options for customized products, tailored to customer benefits / requirements. The right surface for every customer and area of application / living situation.
Different texture options and colours	
Also available for sauna use	
A wide range of construction variants	The right product for every application.
Service programme – cutting to size and simple edge processing and milling work, as well as surface treatment and application of different textures	Capacity balancing in the event of overload of the processor's production / possibility to buy ready-to-assemble furniture parts

