

# Multibond Oak stone

Top layer 2-/3-layer approx. 3,6 mm

Maintenance oil white

brown filler

# Admonter

Wooden Floors



## Admonter on underfloor heating systems

Admonter wooden floors are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet [Admonter on underfloor heating systems](#).

### Admonter accessories

The wide range of accessories matches your natural wooden floor and includes skirting boards and staircase solutions.

### Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit <http://www.admonter.com/en/downloads/>

**PLEASE NOTE:** natural oiled easy care - NO INITIAL OIL TREATMENT IS REQUIRED! You can find repair and supplementary oils in our Admonter price list.

Admonter is a 100% natural product. A picture can therefore never reflect the original. We recommend a consultation based on sample boards.

	Thickn. approx. (mm)	Construction	Width approx. (mm)	Format	Length approx. (mm)	Texture	Finish	Profile
with bevel	10	2-layer	130	small	1200	brushed	ec	Tongue & groove
			130	small	1200	sanded	ml	Tongue & groove
without bevel	10	2-layer	130	small	1200	sanded	ml	Tongue & groove
with bevel	15	3-layer	195	classic	2400	brushed	ec	Tongue & groove
			195	classic	2400	sanded	ml	Tongue & groove
			195	classic	2400	brushed	ec	lock-it
			195	classic	2400	sanded	ml	lock-it

ec: natural oiled easy care, ml: matt lacquered

### BENEFITS at a glance - a technical comparison

Dimension	The large dimension (up to 2400 x 195 mm) with the special small rods optics saves time during installation.
	2 constructions (2-/3-layer)
	2 thicknesses and profiles: approx. 10 mm, 2-layer, tongue & groove - for fully-glue-down installation approx. 15 mm, 3-layer, tongue & groove or lock-it - for floating and fully-glue-down installation
Design	The various lengths of the rods contribute to a design highlight – rod length up to 1000 mm
Weight	A big advantage is the low weight, even having bigger packaging.
Highlights	Small rod optics - for the first time available in Larch.
	Improved warp stability due to 2- and 3-layer solid wood construction.

Installation	2-layer	3-layer
floating	no	yes
stick down	Admonter elastic adhesive notched trowel B11 expansion joints <a href="#">installation instructions</a>	Admonter elastic adhesive notched trowel B11 expansion joints <a href="#">installation instructions</a>

### Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking a <http://www.admonter.com/en/downloads/>

Type of wood	Construction	Thickn. (mm)	Weight [kg/m <sup>2</sup> ]	Moisture content [%]	Lambda [W/m K]	D-Value R [m <sup>2</sup> K/W]	Hardness [N/mm <sup>2</sup> ]	Fire classification
Oak	2-layer	10	5,7	7+/-2	0,15	0,067	41	C <sub>s</sub> -s1
	3-layer	15	7,8	7+/-2	0,14	0,113	41	C <sub>s</sub> -s1



Errors and changes excepted.

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont, Austria | [info@admonter.at](mailto:info@admonter.at) | [admonter.com](http://admonter.com)

30.04.2024

# Multibond Oak stone

Top layer 2-/3-layer approx. 3,6 mm

Maintenance oil white

brown filler

# Admonter

Wooden Floors



The illustrations are a guide to the appearance of the grading.



Errors and changes excepted.

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont, Austria | info@admonter.at | [admonter.com](http://admonter.com)

30.04.2024

# Multibond Oak stone


Top layer 2-/3-layer approx. 3,6 mm

Maintenance oil white

brown filler

# Admonter

Wooden Floors

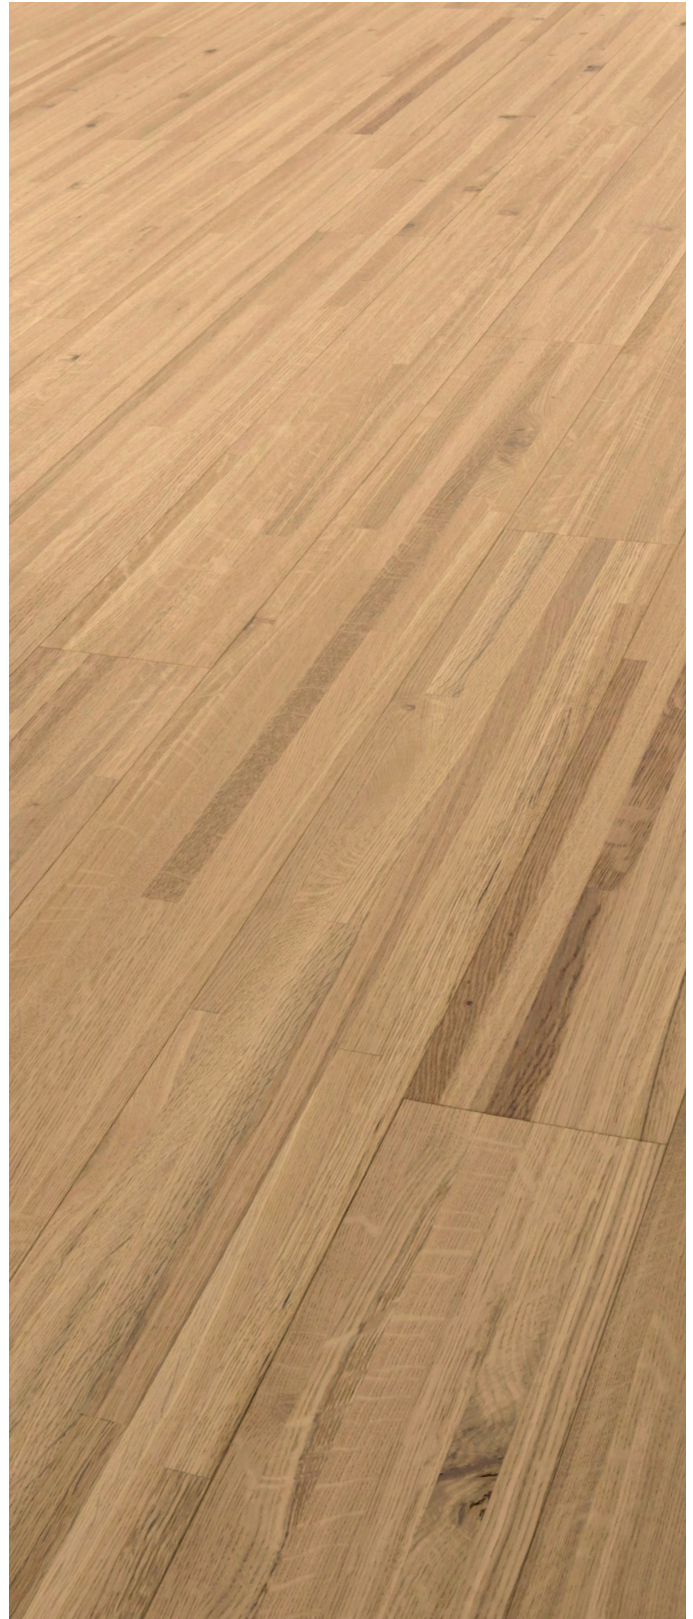

The illustrations are a guide to the appearance of the grading.



Errors and changes excepted.

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont, Austria | info@admonter.at | [admonter.com](http://admonter.com)

30.04.2024

# Multibond Oak stone

Top layer 2-/3-layer approx. 3,6 mm

Maintenance oil white

brown filler

# Admonter

Wooden Floors

## Surface finishes in comparison: same colour but different appearance



matt lacquered



natural oiled easy care



with bevel



without bevel

The illustrations are a guide to the appearance of the grading.



Errors and changes excepted.

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont, Austria | info@admonter.at | [admonter.com](http://admonter.com)

30.04.2024