

Reclaimed wood extreme

brown fillers

Admonter


Wooden panels

AHW: Original, old wood with a surface full of character, sound and black knots possible; big knot holes are filled with end grain knot plugs, smaller ones are filled with brown filler. Resin pockets, shakes, nail holes, bark pockets and mechanical damages possible. Colour variations and worm holes are a valued feature. Lamellas are joint free placed. **Oberfläche:** Only brushed.

Bottom layer CG+: Spruce steamed, no special quality specifications, filled surface.

This panel is also available with sauna-suitable gluing and fulfils the formaldehyde emission requirements in accordance with ÖNORM M 6219-1:2010. Especially when used in saunas, attention must be paid to the possibility of occasional resin leakage and shedding. The maximum permissible temperature of 105°C must not be exceeded, even locally (e.g. near the oven). Where necessary, conformity with ÖNorm M 6219 or the respective other national or local requirements must be ensured by the planning/executing company. Please also refer to our data sheet „Use in saunas“.

The picture shows an example of the natural character of the wood, this will vary in every panel.

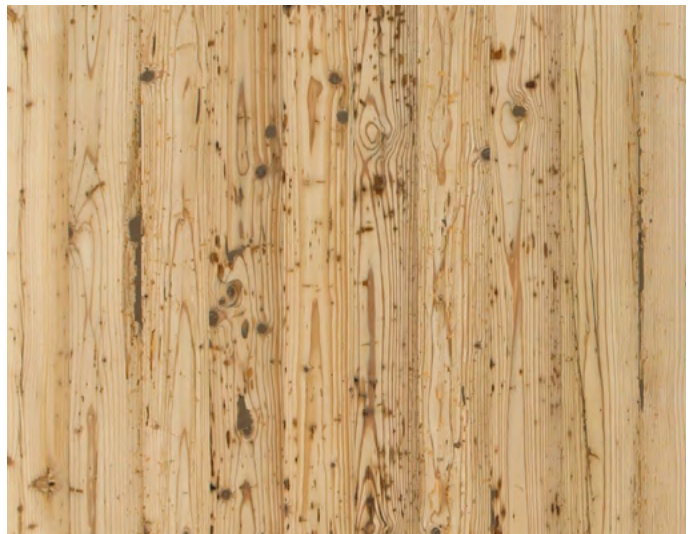

Grading	Thickness mm approx.	Length mm (Width 2030 mm)	Top layer thickl. mm approx.	Top layer width mm	Middle layer (subject to availability)	Packaging pieces/palett
AHW/CG+ (suitable for sauna use)	19	2100-4000 (suitable for sauna use)	5	Mix	SML/BML Spruce	25

The panels are SWP/2 non structural (NS) glued: solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas). Legend: SML = strip core, BML = board middle layer. More information concerning fire classification in the accompanying information to CE-marking.

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads/>

Type of wood	Thickness (mm)	Middle layer	Weigth [kg/m ²]	Moisture content [%]	Lambda [W/m K]
Reclaimed wood	19	Spruce	8,9	8+/-2	0,12




Reclaimed wood extreme

brown fillers

Admonter

Wooden panels

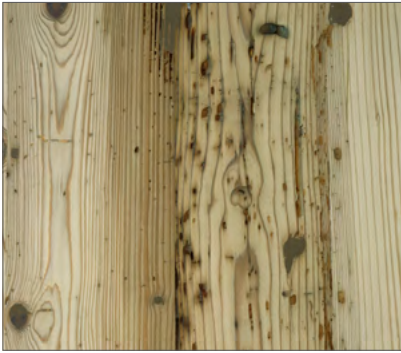

The illustrations show some of the features of this type of panel.





Features wooden panels Elements	Benefit
Standard-width 2030 mm for ALL ELEMENTS	Simple stock-keeping (no short lengths: e.g. reclaimed wood) Calculation of offcuts / less articles by product group -> more comprehensive
Choice of countless wood species – in particular reclaimed wood	Wide range of options for customized products, tailored to customer benefits / requirements. The right surface for every customer and area of application / living situation.
Different texture options and colours	
Also available for sauna use	
A wide range of construction variants	The right product for every application.
Service programme – cutting to size and simple edge processing and milling work, as well as surface treatment and application of different textures	Capacity balancing in the event of overload of the processor's production / possibility to buy ready-to-assemble furniture parts

