

Reclaimed wood sunbaked brushed

Admonter

black fillers
nor cut to size

Wooden panels

AHS: Reclaimed wood panel with a surface full of character and colour variation; heartwood, resin pockets, nail holes, treenails, spike knots, knots, black knots, bark pockets and worm holes acceptable; shakes, mechanical damages and blue stain conditionally acceptable, surface defects professionally filled (some are open); Colour range: mostly brown with typical for reclaimed wood partially colour (grey/brown/black); **Oberfläche:** raw/untreated and not brushed or sanded -> the textured surface is caused by natural weathering of the wood; **Bottom layer C:** Spruce, no special quality specification, not filled.
This panel is also available with sauna-suitable gluing and fulfils the formaldehyde emission requirements in accordance with ÖNORM M 6219-1:2010. Especially when used in saunas, attention must be paid to the possibility of occasional resin leakage and shedding. The maximum permissible temperature of 105°C must not be exceeded, even locally (e.g. near the oven). Where necessary, conformity with ÖNorm M 6219 or the respective other national or local requirements must be ensured by the planning/executing company. Please also refer to our data sheet „Use in saunas“.

The picture shows an example of the natural character of the wood, this will vary in every panel.



Grading	Thickness mm approx.	Length mm (Width 2030 mm)	Top layer thicken. mm approx.	Top layer width mm	Middle layer (subject to availability)	Packaging pieces/palett
AHS/C (suitable for sauna use)	22	2100-3900 (suitable for sauna use)	7-10	Mix	SML/BML Spruce	25
The panels are SWP/2 non structural (NS) glued: solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas). Legend: SML = strip core, BML = board middle layer. More information concerning fire classification in the accompanying information to CE-marking.						

Technical information					
More information (for example concerning fire classification) in the accompanying information to CE-marking at http://www.admonter.com/en/downloads/					
Type of wood	Thickness (mm)	Middle layer	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]
Reclaimed wood sunbaked	22	Spruce	10,3	7+/-2	0,12




Reclaimed wood sunbaked brushed

black fillers
nor cut to size

Admonter

Wooden panels

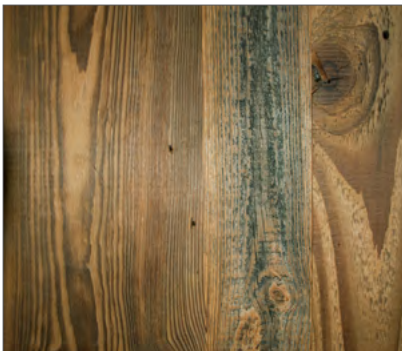

The illustrations show some of the features of this type of panel.



Reclaimed wood sunbaked brushed

black fillers
nor cut to size

Admonter

Wooden panels



Features wooden panels Elements	Benefit
Standard-width 2030 mm for ALL ELEMENTS	Simple stock-keeping (no short lengths: e.g. reclaimed wood) Calculation of offcuts / less articles by product group -> more comprehensive
Choice of countless wood species – in particular reclaimed wood	Wide range of options for customized products, tailored to customer benefits / requirements. The right surface for every customer and area of application / living situation.
Different texture options and colours	
Also available for sauna use	
A wide range of construction variants	The right product for every application.
Service programme – cutting to size and simple edge processing and milling work, as well as surface treatment and application of different textures	Capacity balancing in the event of overload of the processor's production / possibility to buy ready-to-assemble furniture parts

