

Oak medium



filled with brown filler
thermo-treated

Admonter

Wooden panels

A: Typical structural appearance of rift and plain cut, virtually knotless, no sapwood and no repairs, occasional knot points possible, thermo treatment, natural colour variations, jointfree gluing.

B: Typical structural appearance of rift and plain cut; sound knots and dead knots possible, knotholes and shakes professionally filled, thermo treatment, natural colour variations, no sapwood, jointfree gluing.

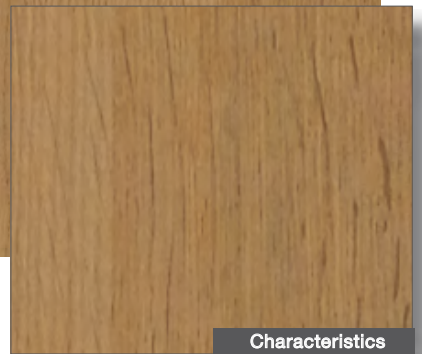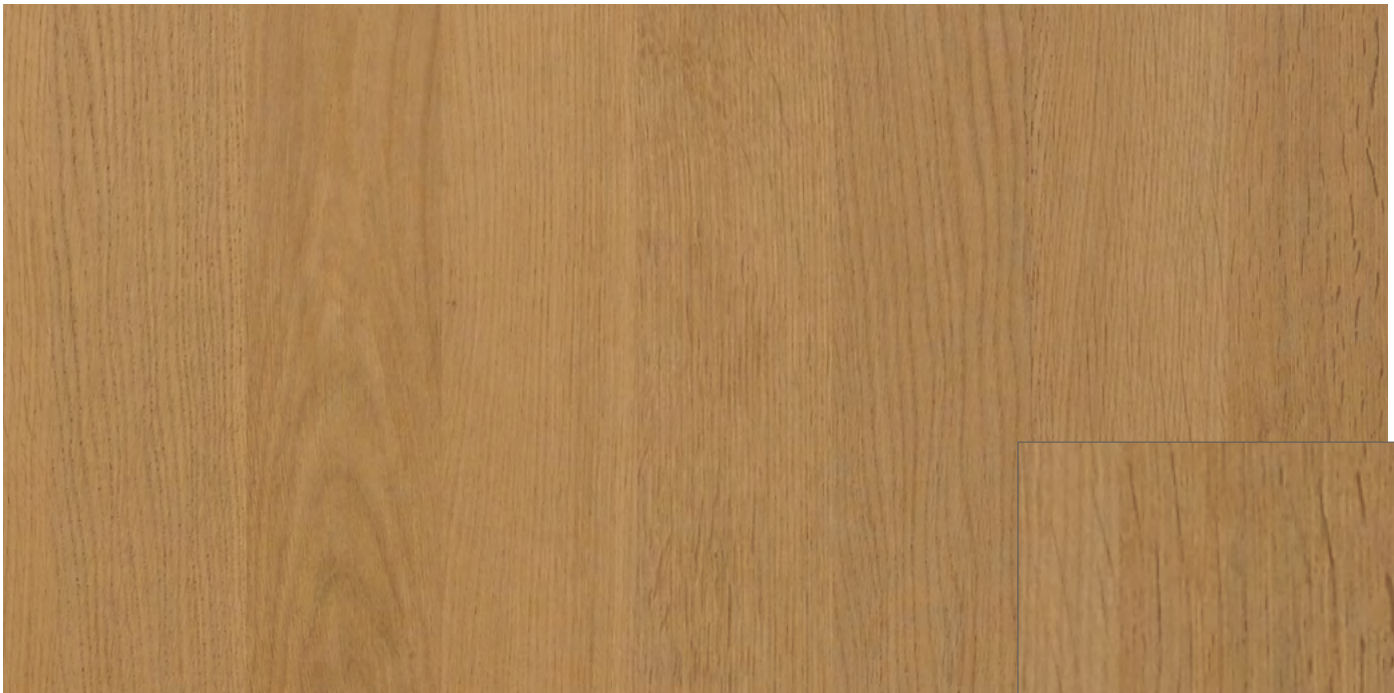

Characteristics

The above picture shows an example of the natural character of the wood, this will vary in every panel.

Grading	Thickness mm app.	Length mm (Width 2030 mm)	Top layer thickness mm	Top layer width mm	Middle layer	Packaging pack./palett
A/A	19	2400	3,6	158	SML Softwood	30
A/B	19	2400	3,6	158	SML Softwood	30

Panels are glued SWP/2 NS (non structural): solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas). Legend: SML = strip core, BML = board middle layer. More information concerning fire classification in the accompanying information to CE-marking.

Technical information					
More information (for example concerning fire classification) in the accompanying information to CE-marking at http://www.admonter.com/de/downloads/					
Type of wood	Thickness (mm)	Middle layer	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]
Eiche Medium	19	Softwood	10,3	5+/-2	0,14



Oak medium

braun ausgefärbt
thermobehandelt

Admonter

Wooden panels



Feature Wooden Floors	Benefit
Choice of countless wood species, in particular reclaimed wood	Wide range of options for customized products, precisely tailored to customer benefits / requirements -> for every customer or area of application.
Different structure possibilities and colour shades	
Individual colours (Easy-Color)	The right surface for every customer or area of application / living situation
Different surfaces (natural oiled easy-care, natural-oiled pro-care, matt lacquered) - advantages EC	
Different construction variants, thickness and profiles / installation systems	The right product for every application / purpose
Different formats (SMALL, CLASSIC, LONG, XXLlong)	The right product for every room size and situation
Different widths that can be laid together	Great appearance on the floor in large rooms
Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside as a counter layer with solid wood construction) For wood type oak 240mm width = hardwood reverse side	Rigid against torsion -> the floor lies flatter and the position of joints is reduced, even with wide plank flooring

