




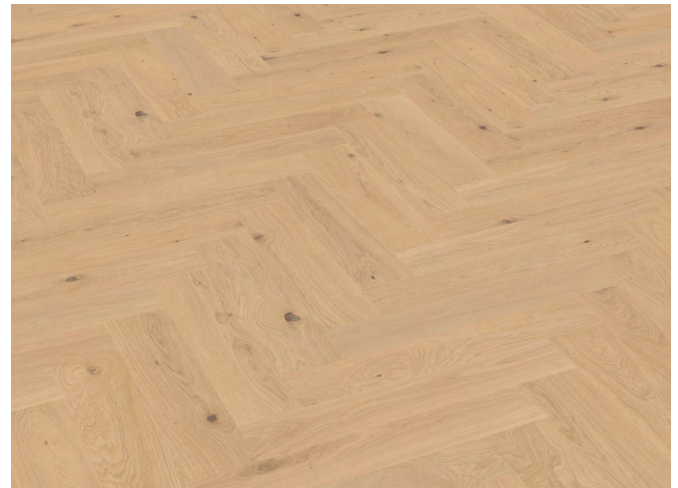


Twin Oak white

Top layer approx. 3,6 mm
Maintenance oil white

Admonter

Wooden Floors

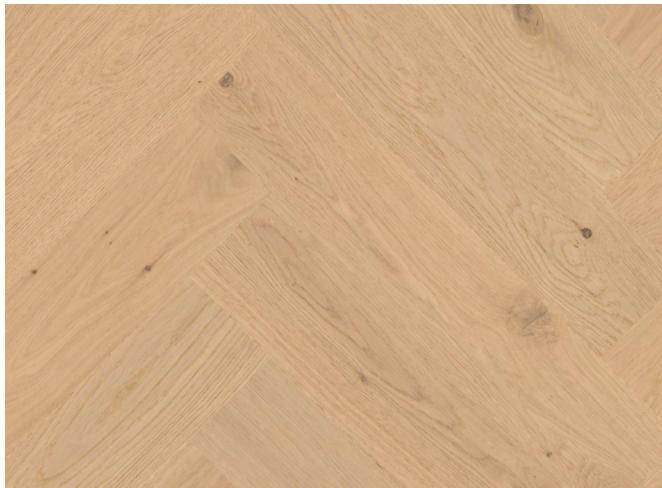

Admonter on underfloor heating systems

Admonter wooden floors are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet [Admonter on underfloor heating systems](#).

Admonter accessories

The wide range of accessories matches your natural wooden floor and includes skirting boards and staircase solutions.

Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit <http://www.admonter.com/en/downloads/>

PLEASE NOTE: natural oiled easy care - NO INITIAL OIL TREATMENT IS REQUIRED! You can find repair and supplementary oils in our Admonter price list.

Admonter is a 100% natural product. A picture can therefore never reflect the original. We recommend a consultation based on sample boards.

| Grading | Thickness (mm) | Construction | Width (mm) | Format | Length (mm) | Texture | Finish | Profile |
|----------|----------------|--------------|------------|--------|-------------|---------|--------|-----------------|
| noblesse | 10 | 2-layer | 120 | small | 590 | brushed | ec | Tongue & groove |
| | | | 120 | small | 1200 | brushed | ec | Tongue & groove |
| | | | 158 | small | 590 | brushed | ec | Tongue & groove |
| | 15 | 3-layer | 120 | small | 590 | brushed | ec | Tongue & groove |
| | | | 158 | small | 590 | brushed | ec | Tongue & groove |
| | | | 158 | small | 1190 | brushed | ec | Tongue & groove |
| basic | 10 | 2-layer | 120 | small | 590 | brushed | ec | Tongue & groove |
| | | | 120 | small | 1200 | brushed | ec | Tongue & groove |
| | | | 158 | small | 590 | brushed | ec | Tongue & groove |
| | 15 | 3-layer | 120 | small | 590 | brushed | ec | Tongue & groove |
| | | | 158 | small | 590 | brushed | ec | Tongue & groove |
| | | | 158 | small | 1190 | brushed | ec | Tongue & groove |



Twin Oak white

Top layer approx. 3,6 mm
Maintenance oil white

Admonter

Wooden Floors



| Feature wooden floors | Benefit |
|--|---|
| Choice of countless wood species, in particular reclaimed wood | Wide range of options for customized products, precisely tailored to customer benefits / requirements -> for every customer or area of application. |
| Different structure possibilities and colour shades | |
| Individual colours (Easy-Color) | The right finish for every customer or area of application / living situation Finish Video liquid test |
| Different finishings (natural oiled easy-care / natural oiled pro care / matt lacquered - advantages EC) | |
| Different construction variants, thicknesses and profiles / installation systems | The right product for every application / purpose |
| Different formats (SMALL, CLASSIC, LONG, XXLlong) | The right product for every room size and situation |
| Different widths that can be laid together | Great appearance of the floor in large rooms |
| Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside as a counter layer with solid wood construction) For wood Type oak 240mm width = hardwood reverse side | Rigid against torsion -> the floor lies flatter and the position of joints is reduced, even with wide plank flooring |

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking a <http://www.admonter.com/en/downloads/>

| Type of wood | Thickness (mm) | Weight [kg/m ²] | Moisture content [%] | Lambda [W/m K] | D-Value R [m ² K/W] | Hardness [N/mm ²] | Fire classification |
|----------------------|----------------|-----------------------------|----------------------|----------------|--------------------------------|-------------------------------|---------------------|
| Oak or Oak Twin | 10 | 5,7 | 7+/-2 | 0,15 | 0,067 | 41 | C _e -s1 |
| Oak Hardwood-Backing | 15 | 8,6 | 7+/-2 | 0,15 | 0,100 | 41 | C _e -s1 |
| Oak Softwood-Backing | 15 | 7,8 | 7+/-2 | 0,14 | 0,107 | 41 | C _e -s1 |








Twin Oak white

Top layer approx. 3,6 mm
Maintenance oil white

Admonter

Wooden Floors

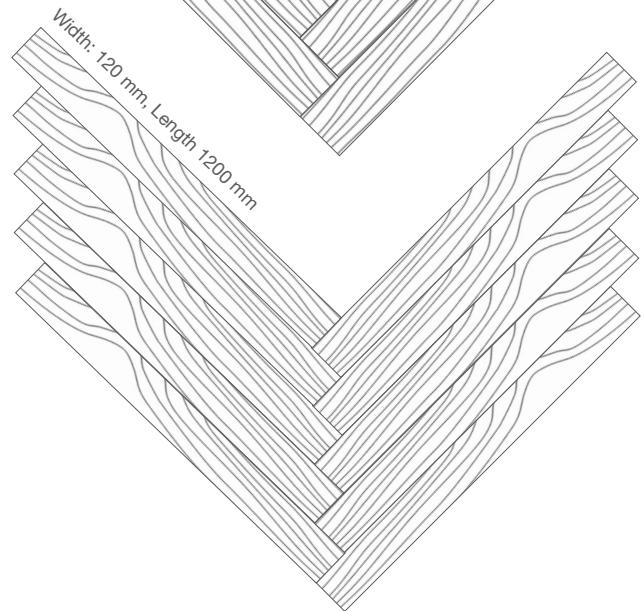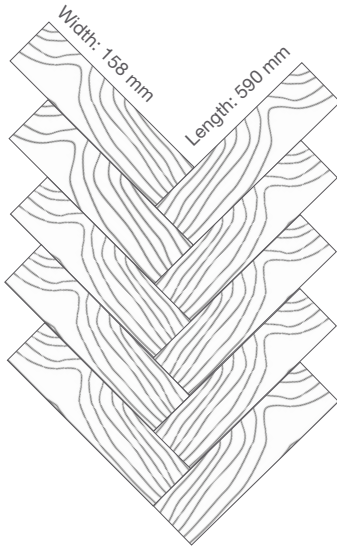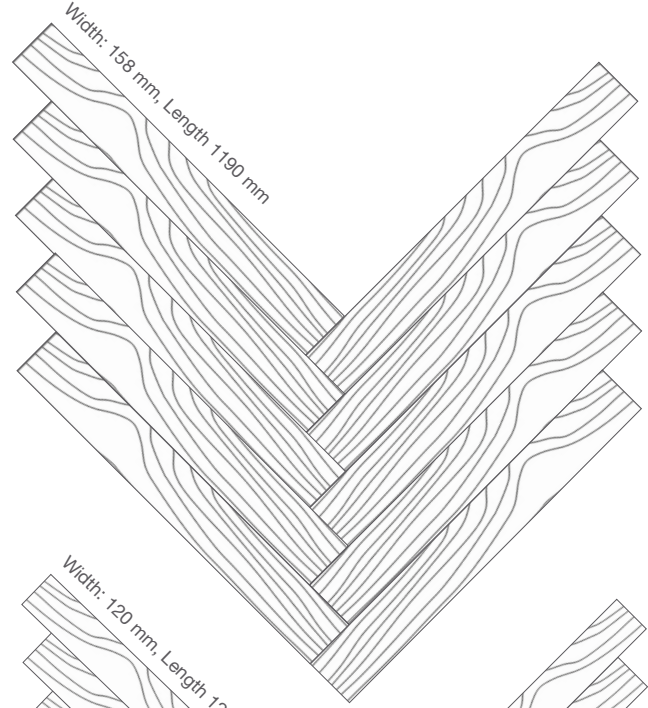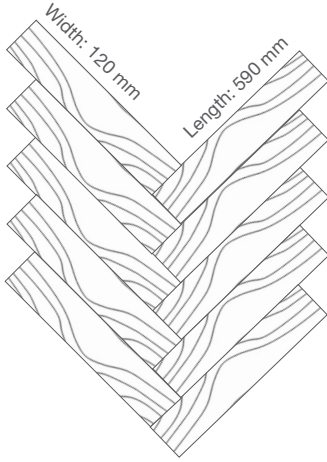

| Lane widths | | |
|-------------|------------|---------|
| Length app. | Width app. | B app. |
| 590 mm | 120/158 | 834 mm |
| 1190 mm | 158 | 1683 mm |

