


# FIR RIFT/SEMIRIFT FINGER-JOINTED

**A:** slight natural colour variation possible, calm and reduced appearance of rift/quarter cut, contrasting colour, variation are a valued feature (greyish/blueish/redish). sound knots and dead knots possible, bark pockets and small cracks as well as cracked knots partially allowed, knotholes professionally filled. Joint free gluing, finger-jointed.

**Backing C:** Fir, no special quality specifications, surface not filled. Finger-jointed.

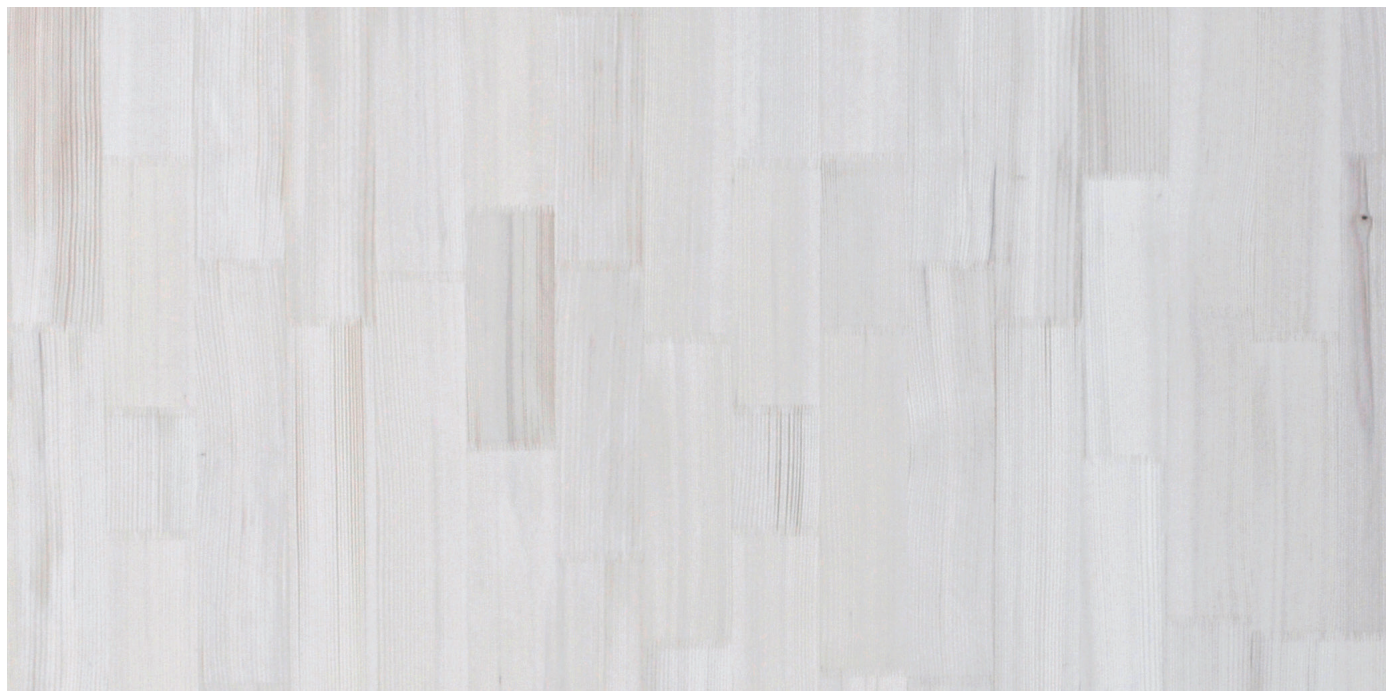

The above picture shows an example of the natural character of the wood, this will vary in every panel.

Top layer

Grading	Thickness mm app.	Length mm (Width 2030 mm)	Top layer thickness mm	Top layer width mm	Middle layer	Packaging pcs./pallet
A/C	19	5000	5	approx. 93	SML/BML Spruce	30

**Panels are glued SWP/2 NS (non structural):** solid wood panels for non-structural use in wet areas, with regard to appropriate constructional protection also suitable for exterior use (sheltered areas).

**Legend:** SML = strip core, BML = board middle layer.

More information concerning fire classification in the accompanying information to CE-marking.



You can find more detailed information at: [admonter.at](http://admonter.at)

# DETAILED PICTURES FIR FINGER-JOINTED



Backing

Detail



Top layer and backing



Backing



Top layer and backing

The above picture shows an example of the natural character of the wood, this will vary in every panel.



You can find more detailed information at: [admonter.at](http://admonter.at)