Admonter
NATURE´S FAVOURITE DESIGNER

CHEVRON LARCH ALBA

2-Layer top layer approx. 2,5 mm
Initial oil treatment required!

FLOORS

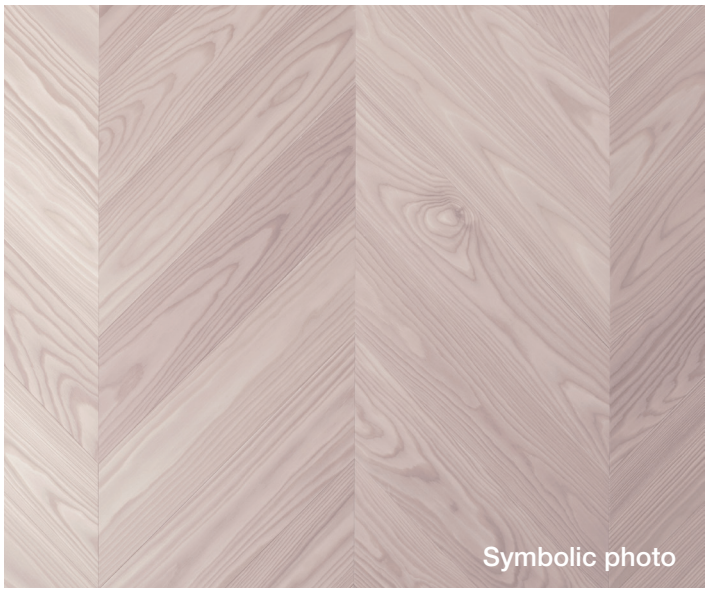

Please note 10 mm/supporting material HDF:
Not suitable for use in the bathroom according to data sheet "Admonter in bathroom".

Admonter FLOORs on underfloor heating systems
Admonter FLOORs are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Admonter FLOORs on underfloor heating systems!

Admonter accessories
The wide range of accessories matches the Admonter FLOORs and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance
Please see the Admonter maintenance & installation instructions or visit www.admonter.com/en/downloads/.

PLEASE NOTE: natural oiled easy care - NO INITIAL OIL TREATMENT IS REQUIRED! Repair and supplementary oils you can find in our Admonter price list. Further information about our products can be found at admonter.com

Grading		Thickness (mm)	Construction	Width (mm)	Length (mm)		Texture	Texture		Profile
elegance	45°	10	2-Layer	**120**	small	500	brushed	ec		Tongue & groove
	60°					525	brushed	ec		Tongue & groove

Backing: Solid wood / **ec:** natural oiled easy care / **ml:** matt lacquer

Please note:
Small formats have to be glued-down with Admonter elastic adhesive over the entire surface.
Only left or right elements per package unit!
Repair and supplementary oils can be found in the Admonter price list.

Technical information
More information (for example concerning fire classification) in the accompanying information to CE-marking at http://www.admonter.com/en/downloads/

Type of wood	Thickness (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m² K/W]	Hardness [N/mm²]	Fire classification
Larch	10	8,6	8+/-2	0,17	0,059	20	D_{fl}-s1
Larch	15	7,8	8+/-2	0,14	0,107	20	C_{fl}-s1

Admonter flooring is a 100 % natural product. A picture is never a substitute for the „real thing". For this reason we recommend a visit to your nearest Admonter flooring dealer. He will be pleased to show you samples.

Admonter Holzindustrie AG, Sägestrasse 539, 8911 Admont, Austria
Errors and changes possible, Phone: +43(0)3613/3350-0, info@admonter.at, admonter.com