## Twin Oak white

Top layer approx. 3,6 mm

Maintenance oil white





Wooden Floors





# Length: 590 mm





#### Admonter FLOORs on underfloor heating systems

Admonter FLOORs are ideally suited for underfloor heating systems. We recommend hot-water underfloor heating systems set at low temperature.



Please find detailed information in the information sheet Admonter FLOORs on underfloor heating systems!

#### Admonter accessories

The wide range of accessories matches the Admonter FLOORs and includes matching boarders, flush-mount skirting and solutions for staircases.

### Regular care and maintenance

Please see the Admonter maintenance & installation instructions for small format floorboards.

#### Further information

http://www.admonter.com/de/downloads/

Grading	Thickn. (mm)	Construction	Item left	n No. riaht	Width (mm)	Format	Length (mm)	Texture	m² / package	Finish	Profile
noblesse	10	2-layer	106279	106290	120	small	590	brushed	1,558	ec	Tongue & groove
			<u>130206</u>	130207	120	small	1200	brushed	1,584	ec	Tongue & groove
			<u>130188</u>	<u>130191</u>	158	small	590	brushed	1,023	ec	Tongue & groove
			<u>130190</u>	<u>130193</u>	158	small	1190	brushed	2,068	ec	Tongue & groove
	15	3-layer	114886	<u>114891</u>	120	small	590	brushed	0,994	ec	Tongue & groove
			130200	130203	158	small	590	brushed	0,651	ec	Tongue & groove
			130202	<u>130205</u>	158	small	1190	brushed	1,316	ec	Tongue & groove
basic	10	2-layer	130208	130209	120	small	590	brushed	1,558	ec	Tongue & groove
			<u>130210</u>	<u>130211</u>	120	small	1200	brushed	1,584	ec	Tongue & groove
			<u>130182</u>	<u>130185</u>	158	small	590	brushed	1,023	ec	Tongue & groove
			130184	<u>130187</u>	158	small	1190	brushed	2,068	ec	Tongue & groove
	15	3-layer	125206	123929	120	small	590	brushed	0,994	ec	Tongue & groove
			130194	<u>130197</u>	158	small	590	brushed	0,651	ec	Tongue & groove
			130196	130199	158	small	1190	brushed	1,316	ec	Tongue & groove

LH-RS: hardwood backing / NH-RS: softwood backing
























## Twin Oak white

Top layer approx. 3,6 mm Maintenance oil white





Wooden Floors

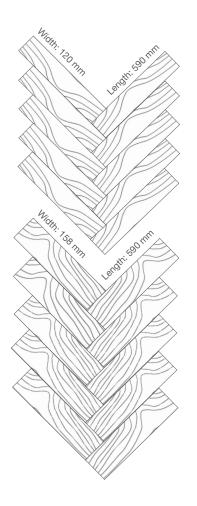



<b>Technical information</b> More information (for example concerning fire classification) in the accompanying information to CE-marking at <a href="http://www.admonter.com/en/downloads/">http://www.admonter.com/en/downloads/</a>								
Type of wood	Thickness (mm)	Weight [kg/m²]	Moisture content [%]	Lambda [W/m K]	d-Value R [m² K/W]	Hardness [N/mm²]	Fire classification	
Oak	10	5,7	7+/-2	0,15	0,067	41	C <sub>f</sub> -s1	
Oak LH RS	15	8,6	7+/-2	0,15	0,100	41	C <sub>f</sub> -s1	
Oak NH RS	15	7,8	7+/-2	0,14	0,107	41	C <sub>f</sub> -s1	

LH-RS: hardwood backing / NH-RS: softwood backing

Pattern widths Width

> approx. 120/158

> > 158

B approx.

834 mm

1683 mm

Length

approx.

590 mm

1190 mm

























Wooden Doors

Twin Oak white

Top layer approx. 3,6 mm Maintenance oil white



Room concepts made of natural wood for floors,



Feature wooden floors	Benefit		
Choice of countless wood species, in particular reclaimed wood	Wide range of options for customized products, precisely tailored to customer benefits / requirements -> for every customer or area of application.		
Different structure possibilities and colour shades			
Individual colours (Easy-Color)	The right surface for every customer or area of application / living situation		
Different surfaces (natural oiled easy-care, natural-oiled pro-care, matt lacquered) – advantages EC			
Different construction variants, thicknesses and profiles / installation systems	The right product for every application / purpose		
Different formats (SMALL, CLASSIC, LONG, XXLong)	The right product for every room size and situation		
Different widths that can be laid together	Great appearence of the floor in large rooms		
Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside as a counter layer with solid wood construction)  For wood type oak 240mm width = hardwood reverse side	Rigid against torsion -> the floor lies flatter and the positon of joints is reduced, even with wide plank flooring		

























