


# TWIN AMERICAN WALNUT

Top layer approx. 3,6 mm

Maintenance oil natur



**FLOORs**

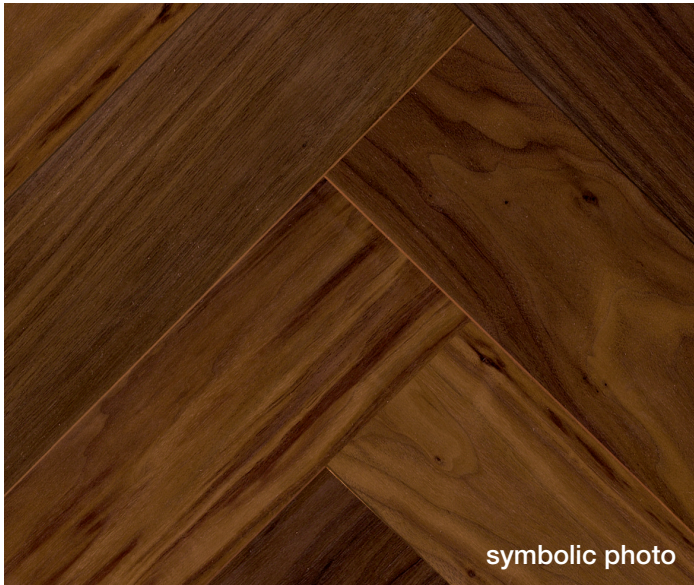

symbolic photo

## Admonter FLOORs on underfloor heating systems

Admonter FLOORs are ideally suited for underfloor heating systems. We recommend hot-water underfloor heating systems set at low temperature.



Please find detailed information in the information sheet Admonter FLOORs on underfloor heating systems!

## Admonter accessories

The wide range of accessories matches the Admonter FLOORs and includes matching boarders, flush-mount skirting and solutions for staircases.

## Regular care and maintenance

Please see the Admonter maintenance & installation instructions for small format floorboards.

## Further information

<http://www.admonter.com/en/downloads/>

Grading	Thickness (mm)	Construction	Width (mm)	Length (mm)	Texture	Finish	Profile	
elegance	10	2-Layer	120	small	590	sanded	ec	Tongue & groove
	15	3-Layer	120	small	590	sanded	ec	Tongue & groove

Backing: Hardwood / ec: natural oiled easy care / ml: matt lacquer

### Please note:

Repair and supplementary oils can be found in the Admonter price list.

### Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.com/en/downloads/>

Type of wood	Thickness (mm)	Weight [kg/m <sup>2</sup> ]	Moisture content [%]	Lambda [W/m K]	d-Value R [m <sup>2</sup> K/W]	Hardness [N/mm <sup>2</sup> ]	Fire classification
American Walnut	10	5,6	7+/-2	0,16	0,063	36	C <sub>e</sub> -s1
American Walnut	13	8,3	7+/-2	0,17	0,088	36	C <sub>e</sub> -s1

