

OAK MEDIUM

Top layer approx. 3,6 mm
thermo-treated
Maintenance oil natural



Admonter FLOORS on underfloor heating systems

Admonter FLOORS are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Admonter FLOORS on underfloor heating systems!


Admonter accessories

The wide range of accessories matches the Admonter FLOORS and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit www.admonter.eu/en/downloads/.

PLEASE NOTE: natural oiled easy care - NO INITIAL OIL TREATMENT IS REQUIRED! Repair and supplementary oils you can find in our Admonter price list. Further information about our products can be found at admonter.at

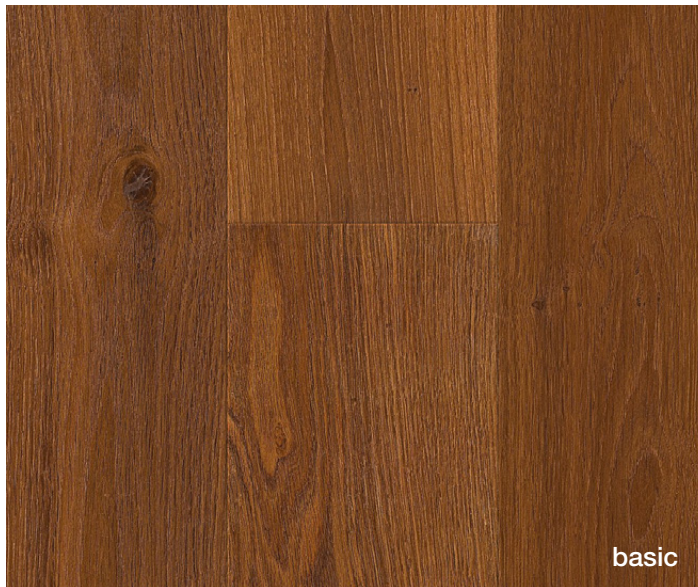

Grading	Thickness (mm)	Construction	Width (mm)		Length (mm)	Texture	Finish	Profile
noblesse	15	3-layer	154	classic	2000	sanded / brushed	ng ml	lock-it
			188	classic	2000	sanded / brushed	ng ml	Tongue & groove
basic	10	2-layer	120	small	1200	sanded / brushed	ng ml	Tongue & groove
			154	classic	2000	sanded / brushed	ng	lock-it
	13	3-layer	118	small	1200	sanded / brushed	ng ml	lock-it
			154	classic	2000	sanded / brushed	ng ml	lock-it
	15	3-layer	188	classic	2000	sanded / brushed	ng ml	Tongue & groove
			188	classic	2000	antico	pc	Tongue & groove

Backing: Solid wood / ng: natural oiled easy care / pc: natural oiled pro care / ml: matt lacquer

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.eu/en/downloads/>

Type of wood	Thickness (mm)	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]	D-Value R[m ² K/W]	Hardness [N/mm ²]	Fire classification
Oak	10	5,7	7+/-2	0,15	0,067	41	C _e -s1
Oak small	13	7	7+/-2	0,14	0,094	41	C _e -s1
Oak LH-RS	15	8,6	7+/-2	0,15	0,100	41	C _e -s1
Oak NH-RS	15	7,8	7+/-2	0,14	0,107	41	C _e -s1

LH-RS: Hardwood-Backing / NH-RS: Softwood-Backing

