

Chevron Oak medium Marrone

3-layer Top layer approx. 3,6 mm
 Maintenance oil brown
 thermo-treated - Initial oil treatment required!

Admonter

Wooden Floors



Grading: noblesse



Admonter on underfloor heating systems

Admonter wooden floors are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet [Admonter on underfloor heating systems](#).

Admonter accessories

The wide range of accessories matches your natural wooden floor and includes skirting boards and staircase solutions.

Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit <http://www.admonter.com/en/downloads/>



Admonter is a 100% natural product. A picture can therefore never reflect the original. We recommend a consultation based on sample boards.

Grading	Thickn. (mm)	Construction	Item. No.		Width (mm)	Format	Length (mm)	Texture	m ² / Pack.	Finish	Profile	
			left	right								
noblesse	45°	15	3-layer	118923	118901	120	small	500	brushed	0,60	ec	Tongue & groove
basic	45°	15	3-layer	119299	119298	120	small	500	brushed	0,60	ec	Tongue & groove

ec: natural oiled easy care

Note:


Per Package are only right or left rods included!

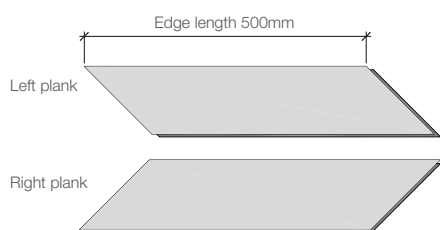

PATTERN WIDTHS
 FORMAT 45°
 15 x 120 x 500 mm

B - approx. 707 mm
 A (calculated) - 169,7 mm

IDEAS FOR INSTALLATION PATTERNS

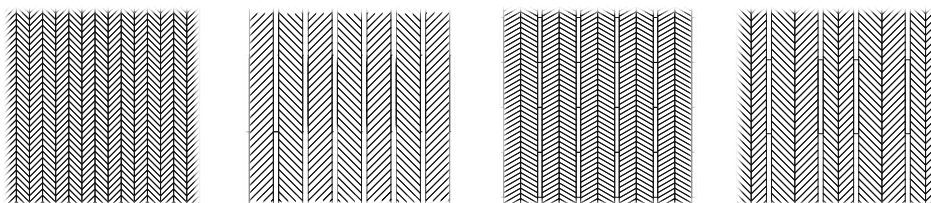


Chevron Oak medium Marrone

Admonter

3-layer Top layer approx. 3,6 mm
 Maintenance oil brown
 thermo-treated - Initial oil treatment required!

Wooden Floors

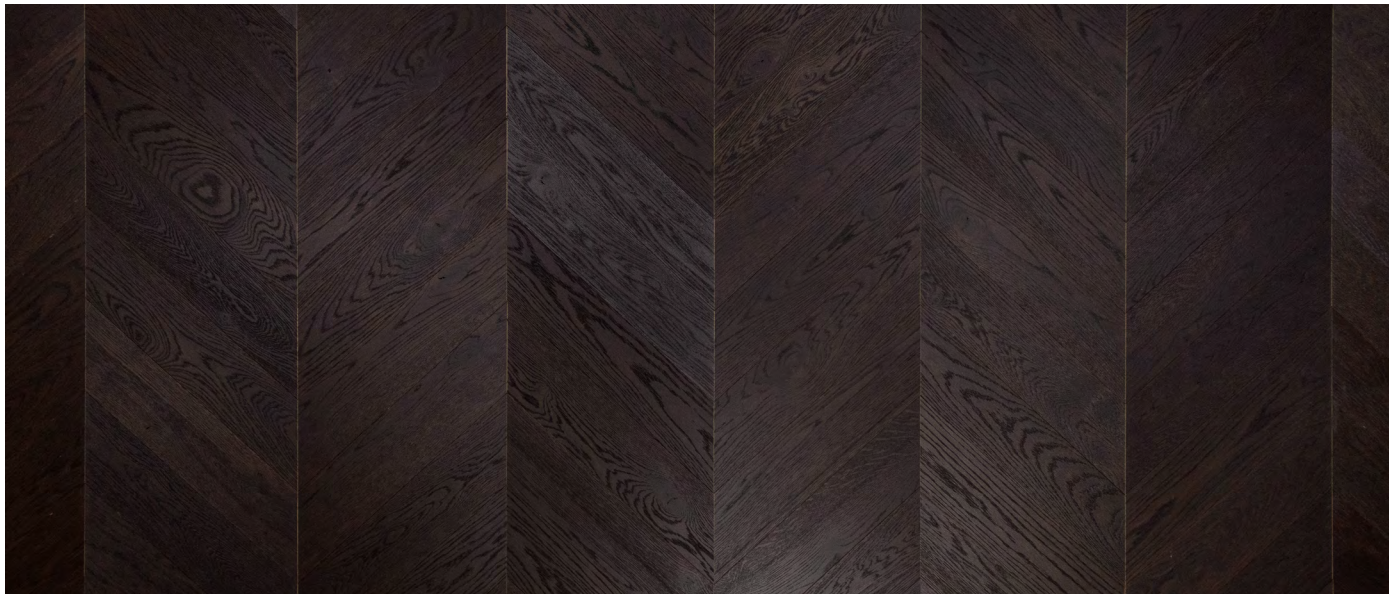

Thermo-treated products:

To create these elegant, dark natural floors, European woods are darkened in a natural way – and this is done completely without pollutants and toxins using the proven heat-treatment process. This process allows the creation of various shades and nuances of colour. This enables us to create a large colour spectrum of dark woods in an environment-friendly way.

Natural color changes:

All Admonter floors are a natural product and will over time change colour. Depending on the amount of exposure your floor has to sunlight, lighter timber will turn darker and darker timber will become lighter. This change is most pronounced in the first 3-6 months.

Feature wooden floors	Benefit
Choice of countless wood species, in particular reclaimed wood	Wide range of options for customized products, precisely tailored to customer benefits / requirements -> for every customer or area of application.
Different structure possibilities and colour shades	
Individual colours (Easy-Color)	The right finish for every customer or area of application / living situation Finish Video liquid test
Different finishings (natural oiled easy-care / natural oiled pro care / matt lacquered) - advantages EC	
Different construction variants, thicknesses and profiles / installation systems	The right product for every application / purpose
Different formats (SMALL, CLASSIC, LONG, XXLlong)	The right product for every room size and situation
Different widths that can be laid together	Great appearance of the floor in large rooms
Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside as a counter layer with solid wood construction) For wood Type oak 240mm width = hardwood reverse side	Rigid against torsion -> the floor lies flatter and the position of joints is reduced, even with wide plank flooring

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking a <http://www.admonter.com/en/downloads/>

Type of wood	Thickness (mm)	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]	D-Value R [m ² K/W]	Hardness [N/mm ²]	Fire classification
Oak medium Marrone	15	7,7	5+/-2	0,14	0,107	39	C _s -s1

