





Twin Oak stone

Top layer approx. 3,6 mm
Maintenance oil natural

Admonter

Wooden Floors

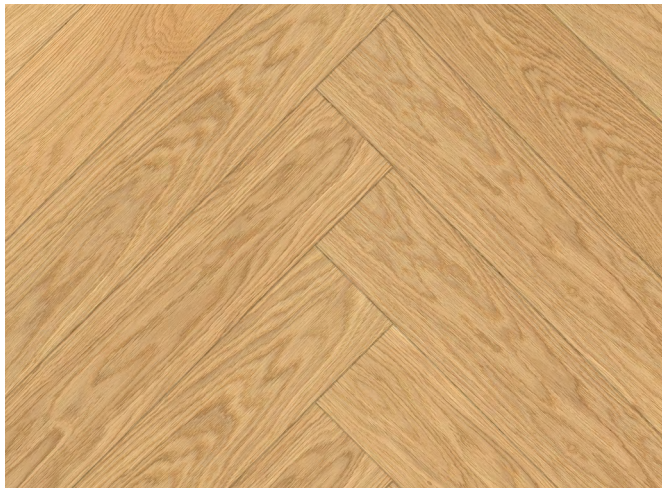

Admonter on underfloor heating systems

Admonter wooden floors are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet [Admonter on underfloor heating systems](#).

Admonter accessories

The wide range of accessories matches your natural wooden floor and includes skirting boards and staircase solutions.

Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit <http://www.admonter.com/en/downloads/>

PLEASE NOTE: natural oiled easy care - NO INITIAL OIL TREATMENT IS REQUIRED! You can find repair and supplementary oils in our Admonter price list.

Admonter is a 100% natural product. A picture can therefore never reflect the original. We recommend a consultation based on sample boards.

Grading	Thickness (mm)	Construction	Width (mm)	Format	Length (mm)	Texture	Finish	Profile
noblesse	10	2-layer	120	small	590	brushed	ec	Tongue & groove
			120	small	1200	brushed	ec	Tongue & groove
			158	small	590	brushed	ec	Tongue & groove
	15	3-layer	120	small	590	brushed	ec	Tongue & groove
			158	small	590	brushed	ec	Tongue & groove
			158	small	1190	brushed	ec	Tongue & groove
basic	10	2-layer	120	small	590	brushed	ec	Tongue & groove
			120	small	1200	brushed	ec	Tongue & groove
			158	small	590	brushed	ec	Tongue & groove
	15	3-layer	120	small	590	brushed	ec	Tongue & groove
			158	small	590	brushed	ec	Tongue & groove
			158	small	1190	brushed	ec	Tongue & groove



Twin Oak stone

Top layer approx. 3,6 mm
Maintenance oil natural

Admonter

Wooden Floors



Feature wooden floors	Benefit
Choice of countless wood species, in particular reclaimed wood	Wide range of options for customized products, precisely tailored to customer benefits / requirements -> for every customer or area of application.
Different structure possibilities and colour shades	
Individual colours (Easy-Color)	The right finish for every customer or area of application / living situation Finish Video liquid test
Different finishings (natural oiled easy-care / natural oiled pro care / matt lacquered - advantages EC)	
Different construction variants, thicknesses and profiles / installation systems	The right product for every application / purpose
Different formats (SMALL, CLASSIC, LONG, XXLlong)	The right product for every room size and situation
Different widths that can be laid together	Great appearance of the floor in large rooms
Admonter solid wood construction for 3-layer floors (top layer, perpendicular middle layer, backside as a counter layer with solid wood construction) For wood Type oak 240mm width = hardwood reverse side	Rigid against torsion -> the floor lies flatter and the position of joints is reduced, even with wide plank flooring

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking a <http://www.admonter.com/en/downloads/>

Type of wood	Thickness (mm)	Weight [kg/m ²]	Moisture content [%]	Lambda [W/m K]	D-Value R [m ² K/W]	Hardness [N/mm ²]	Fire classification
Oak or Oak Twin	10	5,7	7+/-2	0,15	0,067	41	C ₂ -s1
Oak Hardwood-Backing	15	8,6	7+/-2	0,15	0,100	41	C ₂ -s1
Oak Softwood-Backing	15	7,8	7+/-2	0,14	0,107	41	C ₂ -s1



Errors and changes excepted.

Admonter Holzindustrie AG | Sägestraße 539 | 8911 Admont, Austria | info@admonter.at | admonter.com






19.04.2024

Twin Oak stone

Top layer approx. 3,6 mm
Maintenance oil natural

Admonter

Wooden Floors

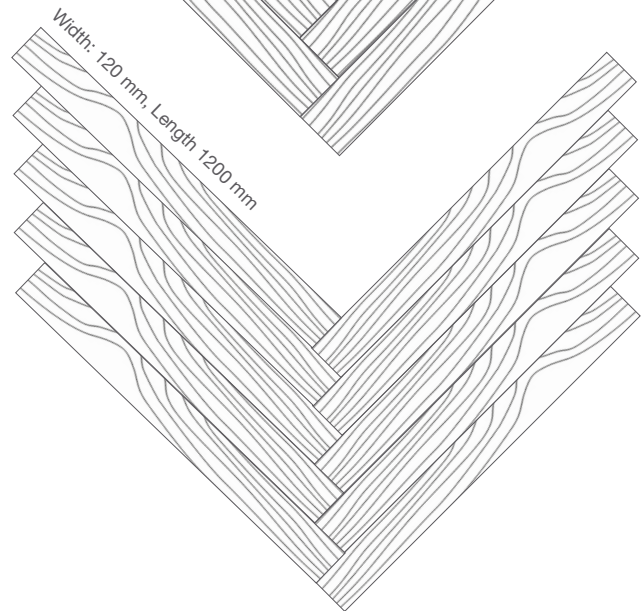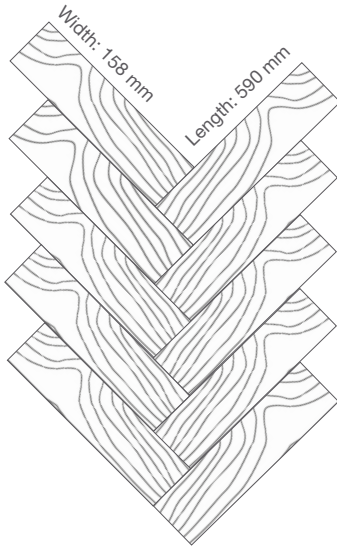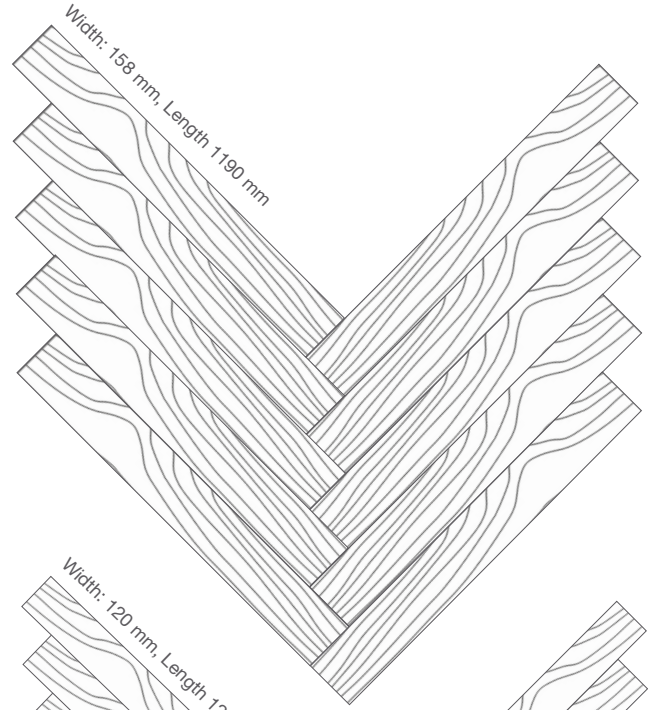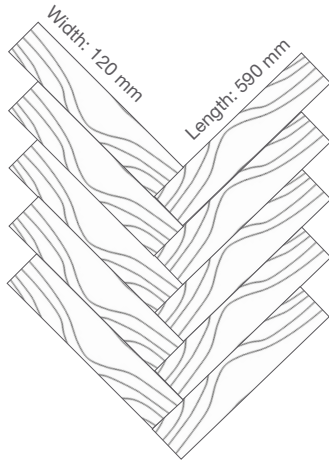

Lane widths		
Length app.	Width app.	B app.
590 mm	120/158	834 mm
1190 mm	158	1683 mm

